


TA2

series

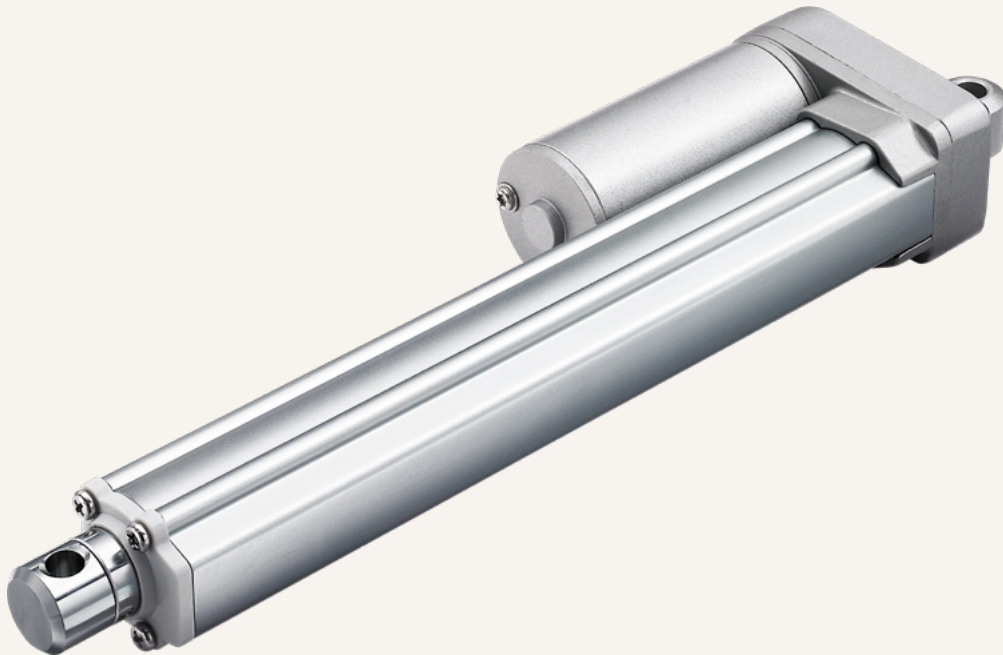

Product Segments

• Industrial Motion


TiMOTION's TA2 series linear actuator is compact, robust and capable of performing well in certain outdoor environments. This linear actuator is perfect for use in small spaces where force or capability cannot be sacrificed. Options include feedback sensors, signal sending limit switches and 90 degree clevis mounting. Industry certifications for the TA2 linear actuator include IEC60601-1, ES60601-1, and EMC.

General Features


Voltage of motor	12, 24, 36, 48V DC, or 12, 24, 36, 48V DC (PTC)
Maximum load	1,000N in pull and push
Maximum speed at full load	51mm/s (with 120N in a push or pull condition)
Stroke	20~1000mm
Minimum installation dimension	≥ Stroke + 105mm (without output signals)
Color	Silver
Certificate	IEC60601-1, ES60601-1, EMC
Operational temperature range	+5°C~+45°C (Load < 500N) -25°C~+65°C (Load ≥ 500N)
Operational temperature range at full performance	+5°C~+45°C
IP rating	Up to IP66D
Options	POT, Reed, Hall sensors
Compact size for limited space	

Drawing

Dimensions without
Output Signals
(mm)

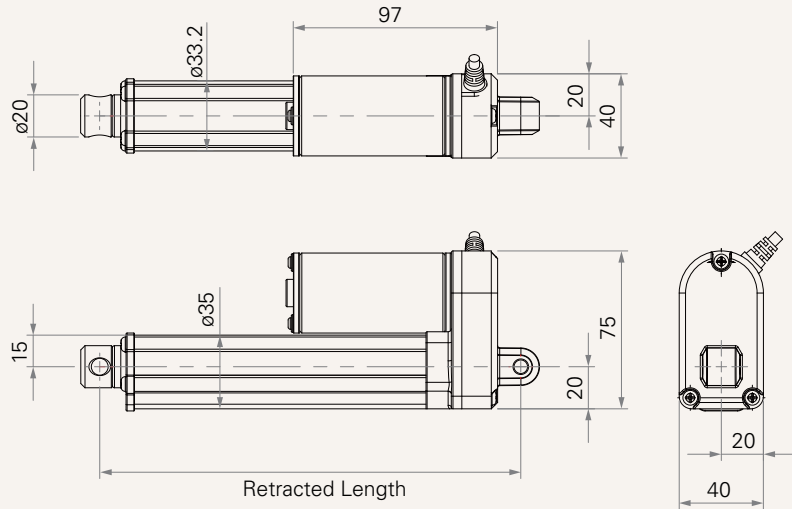

Dimensions with
Output Signals
(mm)

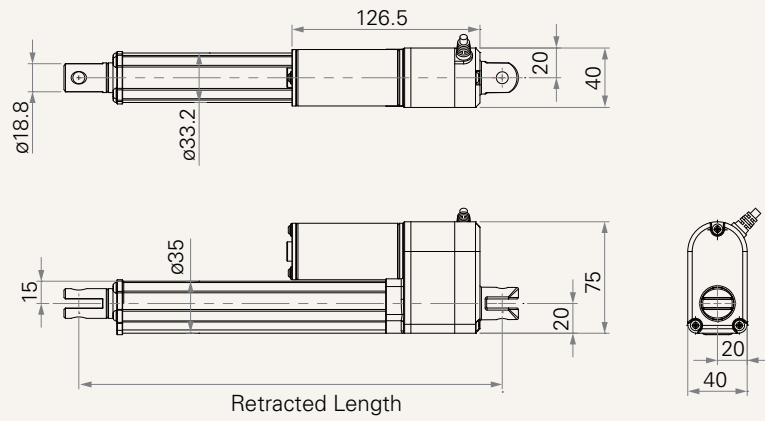

Load and Speed

CODE	Load (N)		Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push	Pull		No Load 24V DC	With Load 24V DC	No Load 24V DC	With Load 24V DC
Motor Speed (4200RPM, duty cycle 25%)							
A	120	120	120	0.8	1.0	44.0	33.0
B	240	240	240	0.7	1.0	22.0	16.5
C	500	500	500	0.6	0.9	11.0	8.5
D	750	750	750	0.6	0.9	7.5	6.2
E	1000	1000	1000	0.6	0.9	5.6	4.6
Motor Speed (6000RPM, duty cycle 25%)							
F	120	120	120	1.0	1.8	67.5	51.0
G	240	240	240	0.9	1.7	33.5	26.5
H	500	500	500	0.8	1.5	17.0	14.0
K	750	750	750	0.8	1.5	11.0	10.0
L	1000	1000	1000	0.8	1.5	9.0	7.6

Note


- 1 With a 12V motor, the current is approximately twice the current measured in 24V. With a 36V motor, the current is approximately two-thirds the current measured in 24V. With a 48V motor, the current is approximately half the current measured in 24V. Speed will be similar for all the voltages.
- 2 This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- 3 Current and speed: Tested average value when stretching in push direction.
- 4 Standard stroke: Min. ≥ 20 mm, Max. please refer to below table.

CODE	Load (N)	Max Stroke (mm)
A, B, F, G	≤ 250	1000
C, D, H, K	≤ 750	800
E, L	≤ 1000	600


Performance Data (24V DC)

Motor Speed (4200RPM, duty cycle 25%)

Speed vs. Load

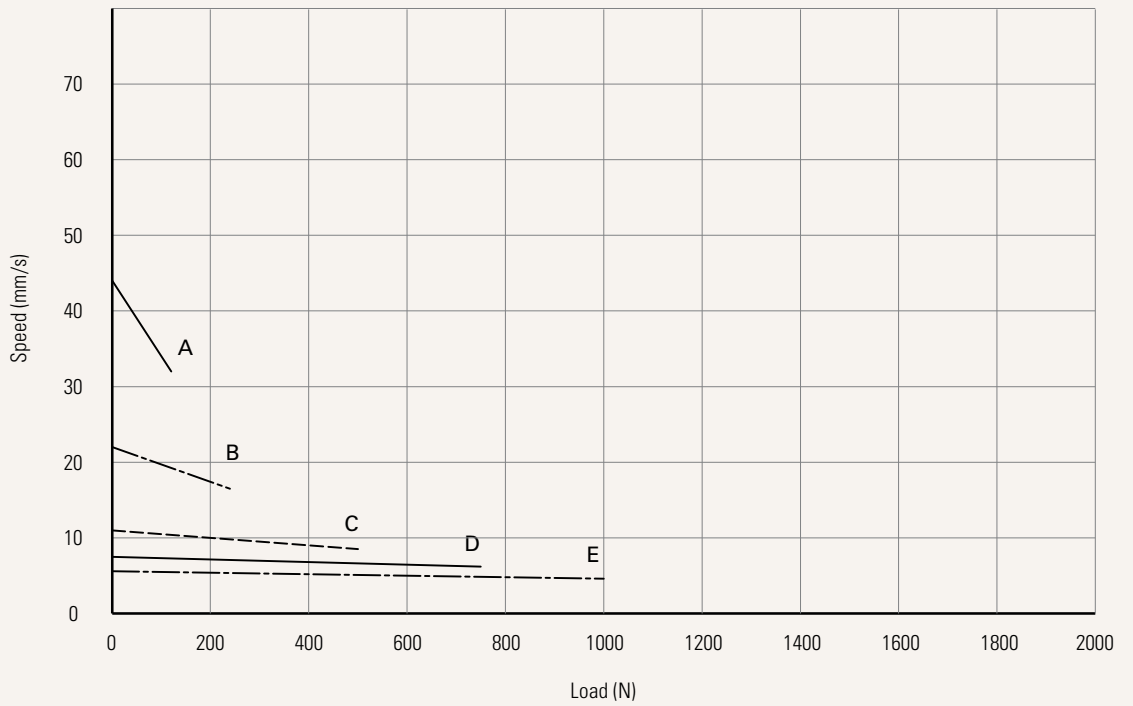


Current vs. Load

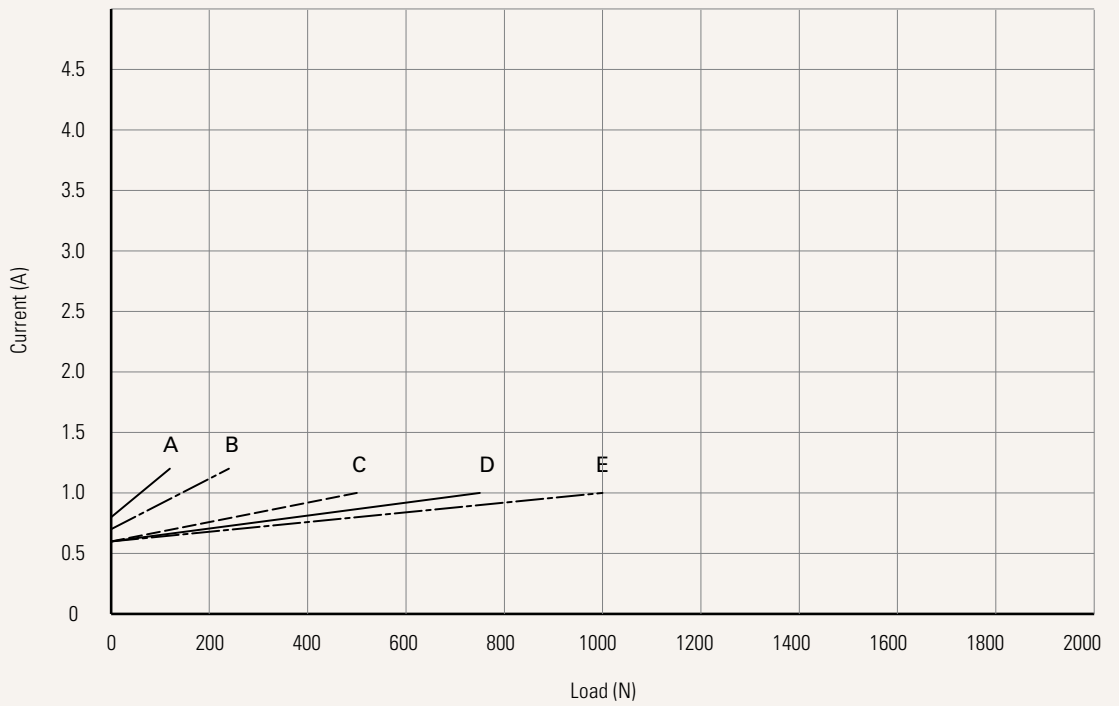


Performance Data (24V DC)

Motor Speed ((6000RPM, duty cycle 25%)

Speed vs. Load

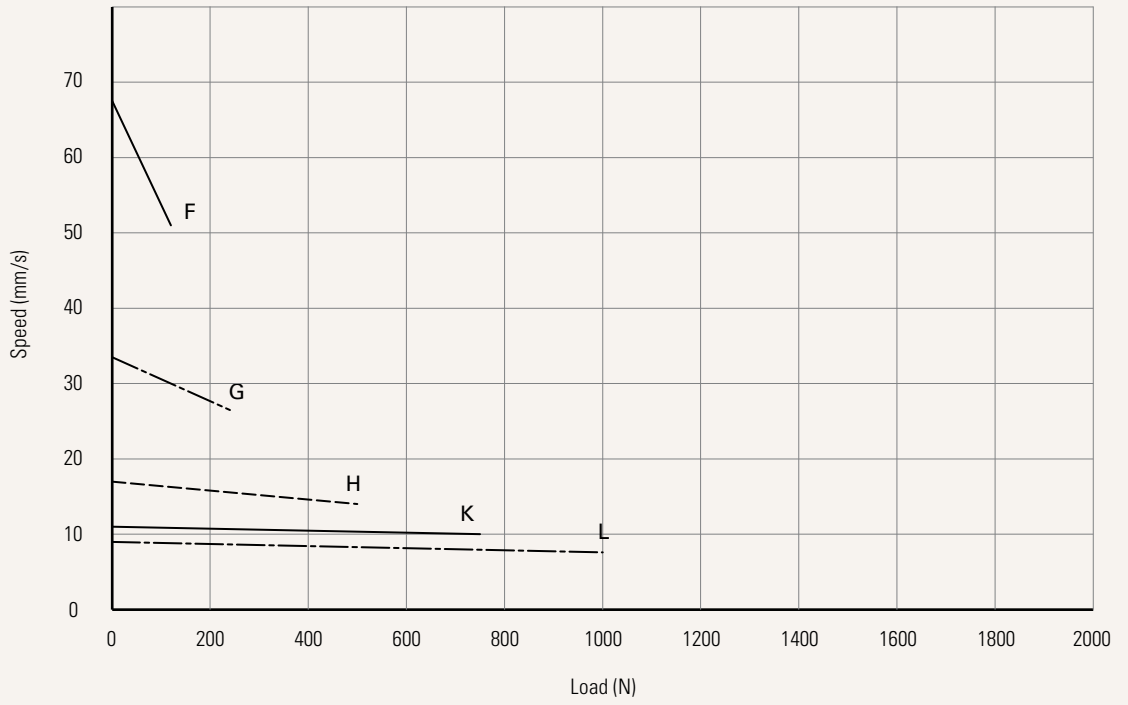

Current vs. Load

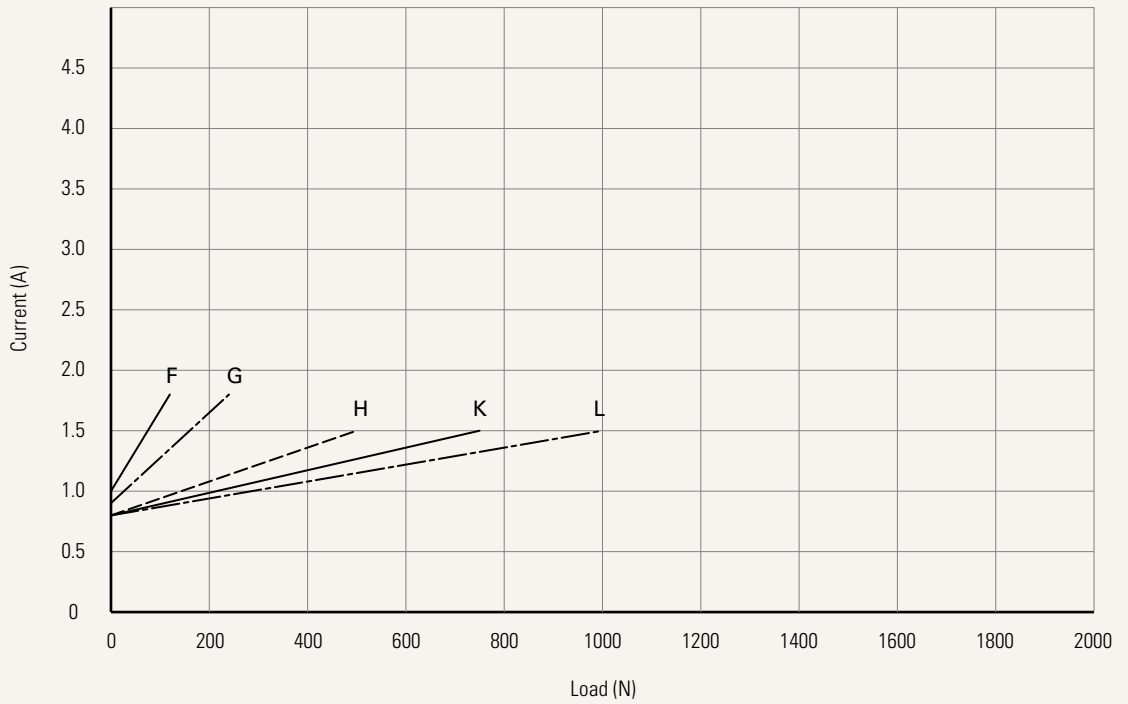

Voltage	1 = 12V DC 2 = 24V DC	3 = 36V DC 4 = 48V DC	5 = 24V DC, PTC 6 = 12V DC, PTC	7 = 36V DC, PTC 8 = 48V DC, PTC
Load and Speed	See page 3			
Stroke (mm)				
Retracted Length (mm)	See page 7			
Rear Attachment (mm) See page 8	1 = Aluminum casting, without slot, hole 6.4, one piece casting with gear box 2 = Aluminum casting, without slot, hole 8.0, one piece casting with gear box 3 = Aluminum casting, without slot, hole 10.0, one piece casting with gear box	4 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 6.4, one piece casting with gear box 5 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 8.0, one piece casting with gear box 6 = Aluminum casting, U clevis, slot 6.0, depth 10.5, hole 10.0, one piece casting with gear box		
Front Attachment (mm) See page 8	1 = Aluminum casting, without slot, hole 6.4 2 = Aluminum casting, without slot, hole 8.0 3 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 10.0	4 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 6.4 5 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 8.0 6 = Aluminum casting, hole 10.0		
Direction of Rear Attachment (Counterclockwise) See page 9	1 = 90°	2 = 0°		
Functions for Limit Switches See page 9	1 = Two switches at full retracted / extended positions to cut current 2 = Two switches at full retracted / extended positions to cut current + third one in between to send signal 3 = Two switches at full retracted / extended positions to send signal 4 = Two switches at full retracted / extended positions to send signal + third one in between to send signal			
Output Signal	0 = Without	1 = POT	3 = Reed sensor	5 = Hall sensors*2
Connector See page 9	1 = DIN 6P, 90° plug	2 = Tinned leads		
Cable Length (mm)	1 = Straight, 300	2 = Straight, 600	3 = Straight, 1000	
IP Rating	1 = Without	2 = IP54	3 = IP66	6 = IP66D

Retracted Length (mm)

1. Calculate $A+B+C = Y$
2. Retracted length needs to \geq Stroke + Y


A. Rear / Front Attachment		
Front Attachment	Rear Attachment	
	1, 2, 3	4, 5, 6
1, 2, 6	+105	+109
3, 4, 5	+115	+119

B. Stroke (mm)	
20~150	-
151~200	+2
201~250	+2
251~300	+2
301~350	+12
351~400	+22
401~450	+32
451~500	+42
501~550	+52
551~600	+62
601~650	+72
651~700	+82
701~750	+92
751~800	+102
801~850	+112
851~900	+122
901~950	+132
951~1000	+142


C. Output Signals	
CODE	
0	-
1, 3, 4, 5	+30

Voltage

5 = 24V DC, PTC




6 = 12V DC, PTC




Rear Attachment (mm)


1 = Aluminum casting, without slot, hole 6.4, one piece casting with gear box




2 = Aluminum casting, without slot, hole 8.0, one piece casting with gear box




3 = Aluminum casting, without slot, hole 10.0, one piece casting with gear box




4 = Aluminum casting, U clevis, slot 6.0, width 10.5, hole 6.4, one piece casting with gear box



5 = Aluminum casting, U clevis, slot 6.0, width 10.5, hole 8.0, one piece casting with gear box




6 = Aluminum casting, U clevis, slot 6.0, width 10.5, hole 10.0, one piece casting with gear box




Front Attachment (mm)


1 = Aluminum casting, without slot, hole 6.4




2 = Aluminum casting, without slot, hole 8.0




6 = Aluminum casting, without slot, hole 10.0




3 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 10.0



4 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 6.4




5 = Aluminum CNC, U clevis, slot 6.0, depth 16.0, hole 8.0




Direction of Rear Attachment (Counterclockwise)

1 = 90°



2 = 0°




Functions for Limit Switches

Wire Definitions


CODE	Pin	1 (Green)	2 (Red)	3 (White)	4 (Black)	5 (Yellow)	6 (Blue)
1	extend (VDC+)	N/A	N/A	N/A	N/A	retract (VDC+)	N/A
2	extend (VDC+)	N/A	middle switch pin B	middle switch pin A	retract (VDC+)	N/A	N/A
3	extend (VDC+)	common	upper limit switch	N/A	retract (VDC+)	lower limit switch	
4	extend (VDC+)	common	upper limit switch	medium limit switch	retract (VDC+)	lower limit switch	

Connector

1 = DIN 6P, 90° plug



2 = Tinned leads



Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.